

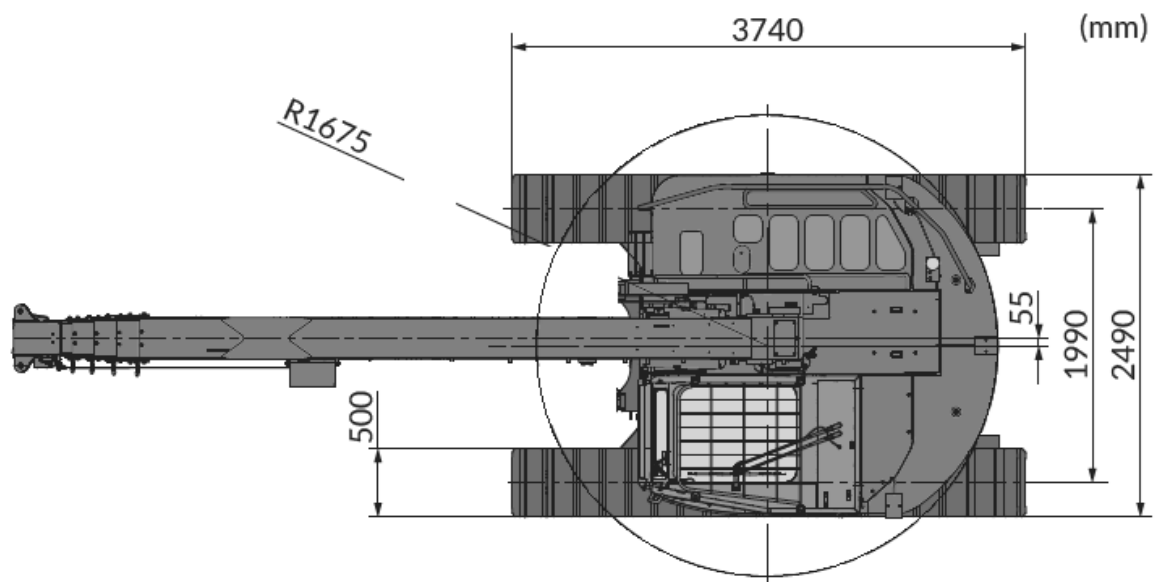


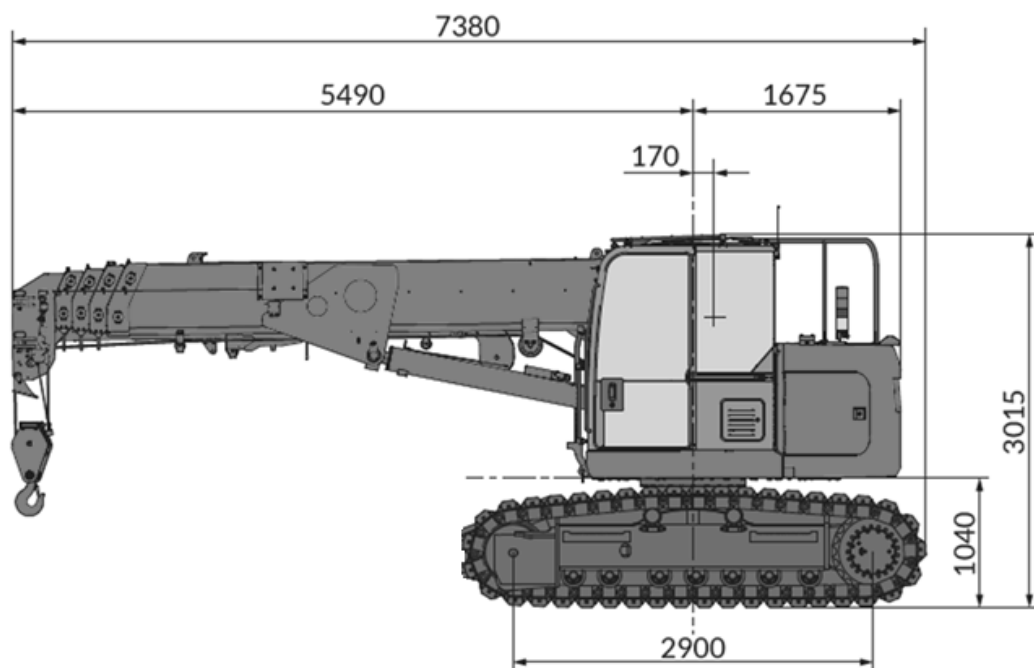

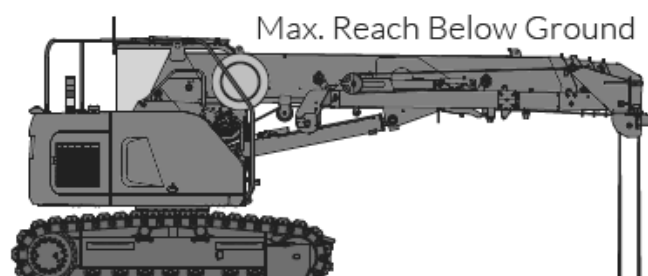

Rated Total Load Chart (6 falls)

unit: kg

Working radius (m)	5.52m Boom		8.99m Boom		12.46m Boom	15.93m Boom	19.40m Boom
	Stationary	Pick & Carry	Stationary	Pick & Carry	Stationary	Stationary	Stationary
2.00	8090	3500	6390	3200			
2.50	8090	3500	6390	3200	4690		
2.80	8090	3500	6390	3200	4690		
3.00	7430	3500	6390	3200	4690	3390	
3.50	6050	3030	6250	3130	4690	3390	2390
4.00	5150	2580	5370	2690	4690	3390	2390
4.50	4520	2260	4670	2340	4590	3390	2390
5.00	4050	2030	4080	2040	4010	3390	2390
5.35	3790	1900	3730	1870	3670	3390	2390
5.50			3590	1800	3530	3340	2390
6.00			3170	1590	3130	3040	2390
6.50			2800	1400	2790	2770	2350
7.00			2490	1250	2500	2540	2140
8.00			1960	980	2030	2140	1800
8.82			1620	810	1720	1860	1570
9.00					1660	1810	1530
10.00					1360	1530	1310
11.00					1120	1300	1130
12.00					920	1100	970
12.29					870	1050	940
13.00						930	850
14.00						780	730
15.00						650	640
15.73						560	570
16.00							550
17.00							480
18.00							410
19.00							350
19.23							340

6 Fall
23.2m

4 Fall
35.8m

2 Fall
73.2m

Single Fall
148.8m

*The Rated Total Load Chart is based on the actual working radius including boom deflection.

*The weight of hook block (standard 6, 4 & 2fall -90kg) must be included as part of the load shown in the Rated Total Load Chart.

*When using 4 falls, 2falls or single fall hooks, use the appropriate 6 fall Rated Total Load Chart above but with a maximum load of : 4 falls-6090kg, 2 falls-3090kg, Single fall-1520kg.