


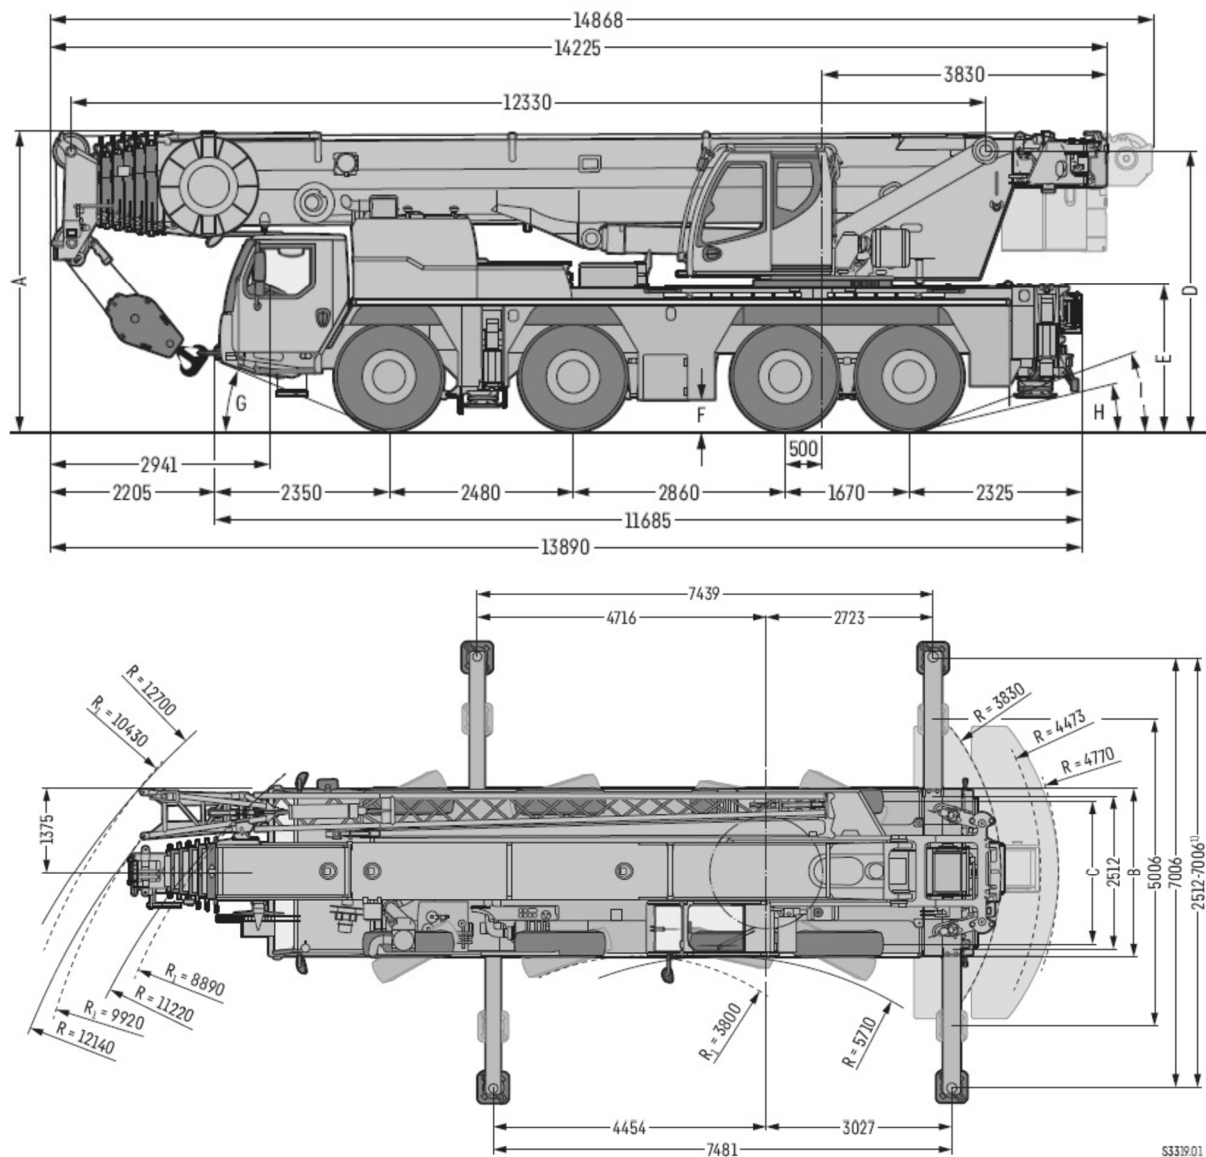

S3319/01

### • Dimensions

|                          | A    | A<br>100 mm* | B    | C    | D    | E    | F   | G   | H   | I   |
|--------------------------|------|--------------|------|------|------|------|-----|-----|-----|-----|
| 385/95 R 25 (14.00 R 25) | 3950 | 3850         | 2750 | 2360 | 3706 | 1866 | 335 | 22° | 11° | 18° |
| 445/95 R 25 (16.00 R 25) | 4000 | 3900         | 2750 | 2300 | 3756 | 1916 | 385 | 23° | 13° | 20° |
| 525/80 R 25 (20.5 R 25)  | 4000 | 3900         | 2890 | 2370 | 3756 | 1916 | 385 | 23° | 13° | 20° |

• lowered

**REQUIRES EXTRA BALLAST DELIVERY BY TRANSPORT**